


NOTE:  
 I. BOOTH IS FABRICATED FROM UNPAINTED 18 GA. GALVANIZED SHEET STEEL; PRE-PUNCHED AND COMPANION FLANGED FOR BOLT TOGETHER ASSEMBLY.

FAN & MOTOR DATA		
DIA.	CFM @ 3/8" S.P.	MOTOR HP.
24"	8,000	2


TYPE	ENCLOSURE	PHASE	VOLTAGE
T1D	TEFC	1	DUAL-VOLT
T35	TEFC	3	575
T3T	TEFC	3	TRI-VOLT
X35	EXPL. PROOF	3	575
X3T	EXPL. PROOF	3	TRI-VOLT

(2) 48" 4 TUBE DUAL VOLTAGE CLASS 1 DIV. 2 INSIDE ACCESS FLUORESCENT LIGHT FIXTURES (WITH TUBES)

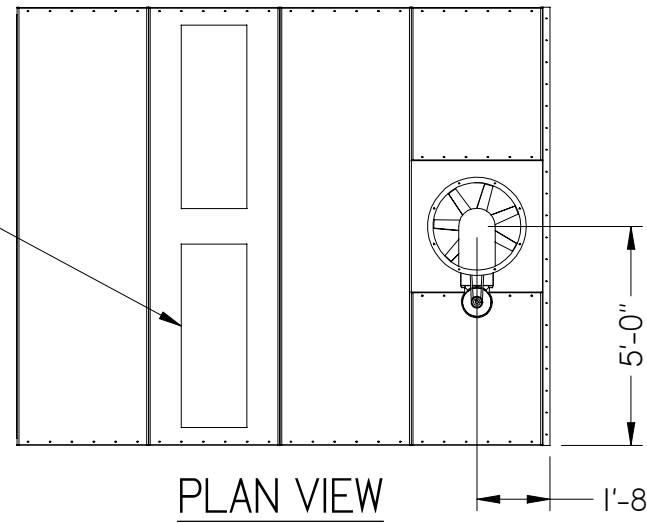


PLAN VIEW

(20) 20 x 20 EXHAUST FILTERS W/ (1) GRID & 4 RUBBER TIPS PER FILTER CELL.

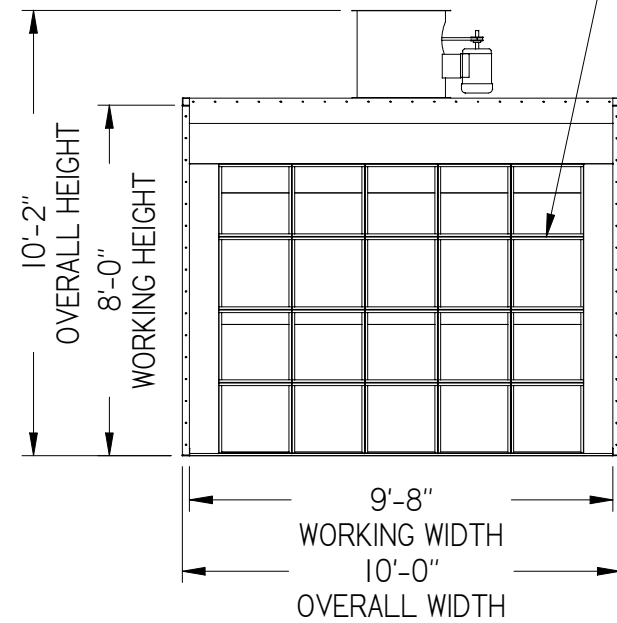


FRONT ELEVATION

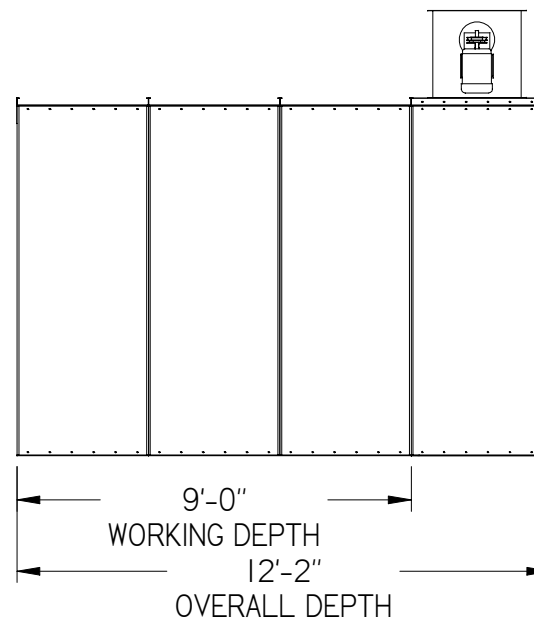

SIDE ELEVATION

(1) Ø24" TUBE AXIAL EXHAUST UNIT

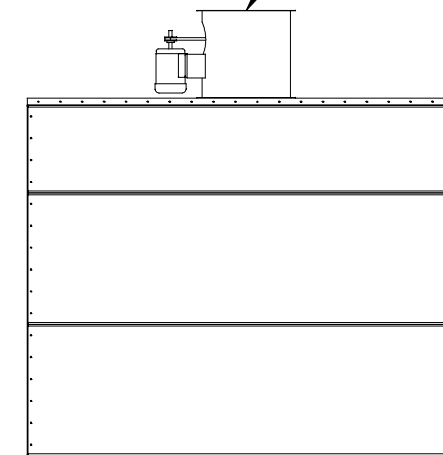

BACK ELEVATION

**GLOBAL FINISHING SOLUTIONS™**  
IMPORTANT NOTE: This print is the confidential property of Global Finishing Solutions L.L.C. and is not to be reproduced, copied, or disseminated without the prior approval of Global Finishing Solutions L.L.C.  
 © GLOBAL FINISHING SOLUTIONS L.L.C. 2003

BARRIE, ONTARIO, CANADA  
 OSSEO, WISCONSIN, USA  
 DALLAS, TEXAS, USA  
 PHONE: 1-800-468-5872 or 1-800-848-8738

CONCEPT REVISION

REV.	DATE:	BY:

CONTROL REVISION

REV.	DATE:	BY:

PROJECT

DESCRIPTION

APPROVED BY

SCALE:	DATE:
DRAWN BY:	REVIEWED BY:

WORK ORDER NUMBER

DRAWING NUMBER

SHEET