




FEATURES

- Premium 18 gauge G90 Galvanized steel construction
- Precision-punched, nut & bolt construction
- Easy field installation
- Quiet blower with explosion proof motor
- Filtered exhaust & intake air
- High efficiency T-8 fluorescent lighting
- Large (3'x7') access door with tempered observation window



MIX ROOM

- Continuous ventilation
- Spill containment
- Color-correct lighting
- Work bench
- Paint storage

Safety

Rohner's paint mix rooms are constructed to NFPA 33 standards and provide a safe, clean, and contained area to store, dispense, and mix paint.

Continuous ventilation of clean filtered air, introduced at the ceiling over the work bench, reduces the operator's exposure to hazardous fumes.

Ventilation rates are sized at a minimum of 8 times the NFPA requirement to further reduce the operator's exposure.




Optional integrated pump mounting support



Optional barrel ramp and double doors

PAINT MIX ROOM SPECIFICATIONS

ROOM DESIGN	STD.	OPT.	ROOM DESIGN	STD.	OPT.
18 Gauge galvanized construction	✓		3' x 7' Access Door with 18" x 24" tempered glass window	✓	
Powder coated white finish		✓	Automatic door closer	✓	
Class 1 Div. 2 sealed inside access light fixtures with color correct lamps	✓		4" Access door spill containment threshold	✓	
1,200 CFM backward inclined ultra-quiet exhaust blower with ¼hp 115V/60/1 explosion proof motor	✓		36" W x 4" H x 24" D barrel ramp constructed of ¼" painted diamond plate steel, interior/exterior		✓
1,200 CFM supply blower for pressurized clean room environment		✓	2' Deep 14 gauge galvanized mix bench		✓
Spill containment sump with grated cover		✓	Integrated 12 gauge pump mounting support		✓

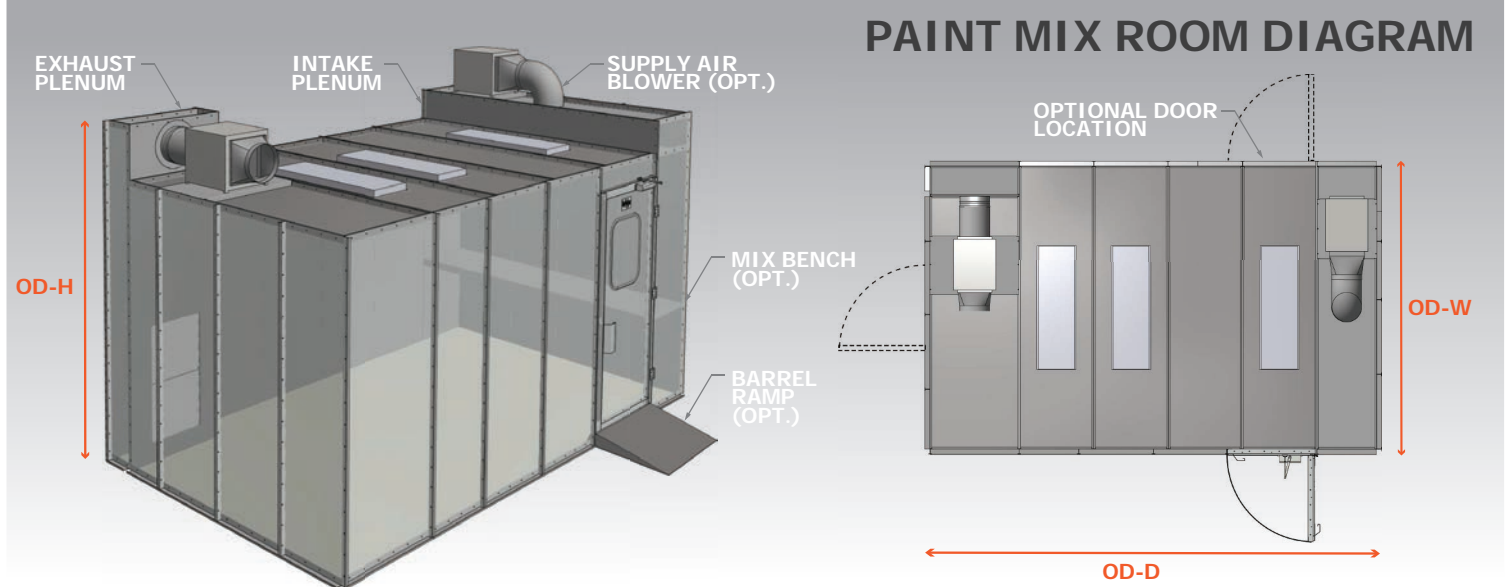

NOTE: Shown with optional pressurized supply blower, mix bench, and ramp.

MODEL	Working Dim. (WD)			Overall Dim. (OD)			Area (Sq Ft)	Std. Lights	Intake Filters	Man Doors
	W	H	D	W	H	D				
6'-0" Wide										
MX-6-8-12-N	5'-6"	7'-10"	12'-0"	5'-10"	9'-6"	12'-4"	66	1	3	1
MX-6-8-18-N	5'-6"	7'-10"	18'-0"	5'-10"	9'-6"	18'-4"	99	2	3	1
MX-6-8-24-N	5'-6"	7'-10"	24'-0"	5'-10"	9'-6"	24'-4"	132	3	3	1
MX-6-8-27-N	5'-6"	7'-10"	27'-0"	5'-10"	9'-6"	27'-4"	149	3	3	1
8'-0" Wide										
MX-8-8-8-N	7'-6"	7'-10"	8'-0"	7'-10"	9'-6"	8'-4"	60	1	4	1
MX-8-8-10-N	7'-6"	7'-10"	10'-0"	7'-10"	9'-6"	10'-4"	75	1	4	1
MX-8-8-12-N	7'-6"	7'-10"	12'-0"	7'-10"	9'-6"	12'-4"	90	2	4	1
MX-8-8-15-N	7'-6"	7'-10"	15'-0"	7'-10"	9'-6"	15'-4"	113	2	4	1
10'-0" Wide										
MX-10-8-10-N	9'-6"	7'-10"	10'-0"	9'-10"	9'-6"	10'-4"	95	2	5	1
MX-10-8-12-N	9'-6"	7'-10"	12'-0"	9'-10"	9'-6"	12'-4"	114	2	5	1
MX-10-8-15-N	9'-6"	7'-10"	15'-0"	9'-10"	9'-6"	15'-4"	143	3	5	1
12'-0" Wide										
MX-12-8-12-N	11'-6"	7'-10"	12'-0"	11'-10"	9'-6"	12'-4"	138	3	6	1
MX-12-8-13-N	11'-6"	7'-10"	13'-0"	11'-10"	9'-6"	13'-4"	150	3	6	1

NOTE: Standard Mix Room is non-pressurized and includes: (1) Access door (located opposite corner from exhaust plenum) with a 4" access door spill containment threshold.

TABLE LEGEND

MX = Paint Mix Room N = Non-pressurized

Specifications and designs are subject to change and substitution at the manufacturer's sole discretion without notice. Customer is responsible for determining the suitability of the equipment for its intended use. Additional equipment or modifications may be required to meet local building and process specific regulatory codes and are the responsibility of the Customer.



www.rohner-usa.com
888.885.7641